


# Phantom Muzzle Brake Installation

Inside your box:

You will find a Phantom Muzzle Brake, a Jam nut, and a Fenix Wrench.

You will also need a 7/8" wrench to fit the jam nut and a clamping device for your barrel.

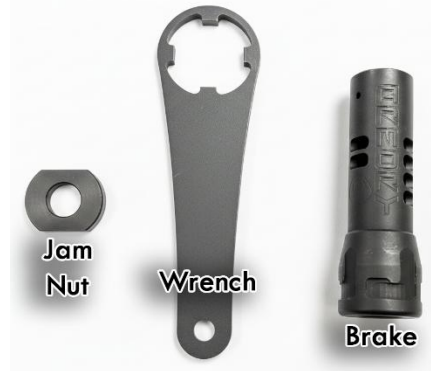

**Make sure your firearm is not loaded.**

- 1) Remove any other barrel device.
- 2) Secure your firearm with a proper clamping device.
- 3) Thread the Jam Nut onto the barrel as far as you can, hand tight only.



- 4) Thread the Phantom Muzzle brake onto the barrel until it contacts the jam nut, hand tight only.



- 5) Turn the Phantom brake counterclockwise until the word Phantom is straight up at the 12 o'clock position.
- 6) Place the supplied Fenix wrench onto the grooves of the Phantom brake.
- 7) Place your 7/8" wrench on the jam nut.
- 8) While holding the Phantom brake at the 12 o'clock position, tighten the jam nut toward the Phantom brake using 15-20lbs of torque 30 lbs. max

Thank you for choosing Fenix Armory. Contact us if you have any questions or need assistance. [www.FenixArmory.net](http://www.FenixArmory.net) (870) 738-8656

Scan QR code for Video Instructions.

